


# FIVE STAR PROTECTION

**LOCK**  
 **and GO**  
**FLOORING**

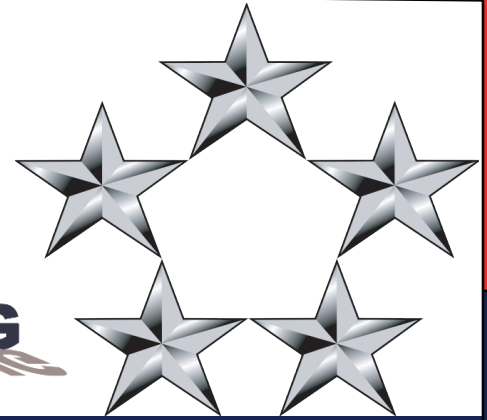

## Floating LVT Underlayment

### PRODUCT SPECIFICATIONS

- Item #: LNGLVT (100 sf roll)
- 1.5mm Thick
- Dense EVA 180 kgs/m<sup>3</sup> (Ethylene-Vinyl Acetate) Antimicrobial Construction
- Made from Virgin EVA
- .08 mm Polyethylene Film Moisture Barrier attached
- Mold and Mildew Resistant
- Ultimate Sound Reduction reduces reflective sound noise and through the floor sound transmission STC Rating 73 IIC Rating 72
- Not for use in raised wood-frame structures without HVAC control underneath the areas where underlayment is used.
- For use with Floating LVT or WPC products not for use with Loose Lay material.

## Installation:

- 1) Roll out LVT Underlayment on a Dry, Clean, and Flat Subfloor
- 2) Roll underlayment over subfloor with rhombs side down against the subfloor.
- 3) Roll the underlayment out with the next row butting the foam to the previous row. Any tears in the foam under should be taped repairing the barrier.
- 4) After all underlayment is laid, Install your floor according to the manufacturers' instructions.

**Distributed By:**

**Crescent Hardwood Supply, Inc.**

1101 Sams Avenue  
Harahan, LA 70123  
504-309-6950