


# FIVE STAR PROTECTION

**LOCK**  
 **and GO**  
**FLOORING**

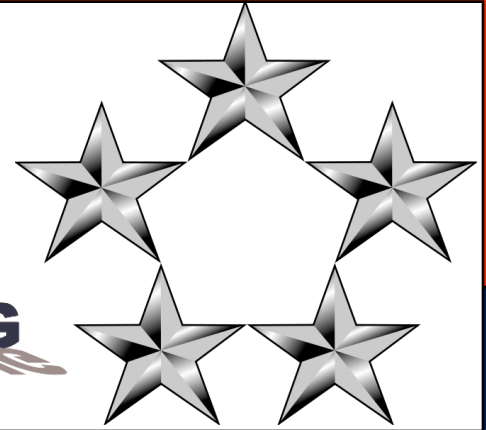

## Ultimate Underlayment PRODUCT SPECIFICATIONS

- Item #: LNGUU (100 sf roll)    LNGUU3 (300 sf roll)
- 3mm Thick
- Dense EVA 110-120KGS/M3 (Ethylene-Vinyl Acetate) Antimicrobial Construction
- Made from Recycled Content
- .08 mm Polyethylene Film Moisture Barrier with
- Sealing Overlap Tape Strip Attached
- Ultimate Sound Reduction reduces reflective sound noise and through the floor sound transmission STC Rating 72 IIC Rating 71
- Not for use in raised wood-frame structures without HVAC control underneath the areas where underlayment is used.
- Not for use with Floating LVT

---

## Installation:

- 1) Roll out Ultimate Underlayment on a Dry, Clean, and Flat Subfloor
- 2) Put the tape side to the wall, then roll underlayment over subfloor with vapor barrier down against the subfloor.
- 3) Roll the foam out with the next row butting the foam to the previous row.
- 4) Remove tape strip and place the overlapping poly film to the tape strip creating a moisture barrier. Any tears in the foam under should be taped repairing the barrier.
- 5) After all underlayment is laid, Install your floor according to the manufacturers' instructions.

---

**Distributed By:**  
**Crescent Hardwood Supply, Inc.**

1101 Sams Avenue  
Harahan, LA 70123  
504-309-6950